

FOOD SAFETY THERMOMETERS

Pocket Test Type



Pocket Thermometer with Magnifying Lens



- Stainless Steel Case
- 1" White Dial with Black Markings
- 5" Long Stem, Ø 0.150"
- Red Pointer
- Recalibrator Lug
- White Plastic Sheath
- NSF® Listed

Models

Model	Range
B1098M90C-5.0	-40 to 160°F
B1098M82C-5.0	0 to 220°F*
B1098M43C-5.0	25 to 125°F*
B1098M95C-5.0	50 to 500°F
B1098M28C-5.0	0 to 100°C
B1098M42C-5.0	-40 to 70°C

*NSF® listed range.

Pocket Thermometer with Domed Lens





- Stainless Steel Case
- 1" White Dial with Black Markings
- 5" Long Stem, Ø 0.150"
- Red Pointer
- Recalibrator Hex Nut
- White Plastic Sheath
- NSF® Listed

Models

Model	Range
B1098D90A-5.0	-40 to 160°F
B1098D82A-5.0	0 to 220°F*
B1098D43A-5.0	25 to 125°F*
B1098D95A-5.0	50 to 500°F
B1098D28A-5.0	0 to 100°C
B1098D42A-5.0	-40 to 70°C

*NSF® listed range.

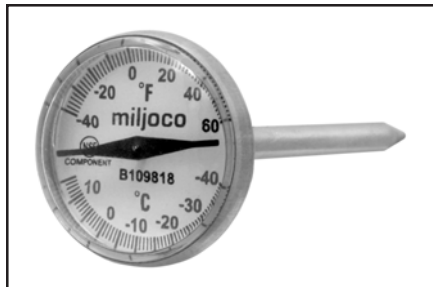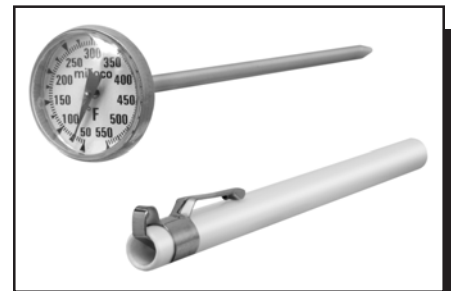

Refrigerator Case Thermometer



- Stainless Steel Case
- 1" White Dial with Black Markings
- Ø 0.150" Stem with 1/4-28 Connection
- Installation Nut
- Red Pointer
- Recalibrator Hex Nut
- NSF® Listed

Models

Model	Stem Length
B1098D18D-2.5	2½"
B1098D18D-3.5	3½"
B1098D18D-5.0	5"

Accessory

- #65-11 2-Hole Mounting Flange

CD109885 Digital Pocket Test Thermometer

- 1¼" Brown Plastic Case
- 5" Long Stem, Ø 0.150"
- Switchable Between F/C
- On/Off Switch
- 58 to 302°F & -50 to 150°C

