
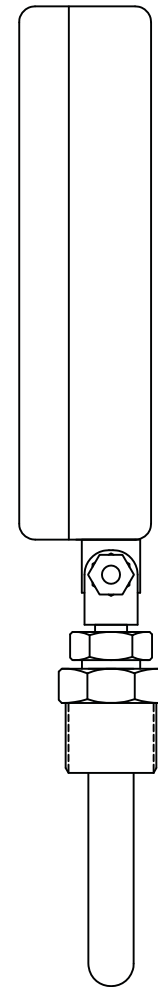


**GENERAL SPECIFICATIONS**

Case & Ring: High polished stainless steel  
 Lens: Acrylic  
 Dial: Aluminum with white finish and black markings  
 Pointer: Adjustable  
 Movement: Precision brass with milled teeth  
 Bourdon Tube: Phosphor bronze - vapor actuated  
 Connection: 1/2"NPT brass union  
 Accuracy: ±1 scale division  
 Bulb: Furnished standard with a copper bulb  
         1/16" O.D. x 2 1/2" (other bulb lengths available)  
 Assembly Origin: **United States of America**

Range Code	Temperature Ranges
30	-40 to 110°F
31	-40 to 110°F/C
19	0 to 100°F
29	0 to 100°F/C
49	0 to 150°F
79	0 to 150°F/C
72	0 to 180°F
73	0 to 180°F/C
50	30 to 240°F
51	30 to 240°F/C
60	30 to 300°F
61	30 to 300°F/C

Note: Other ranges available

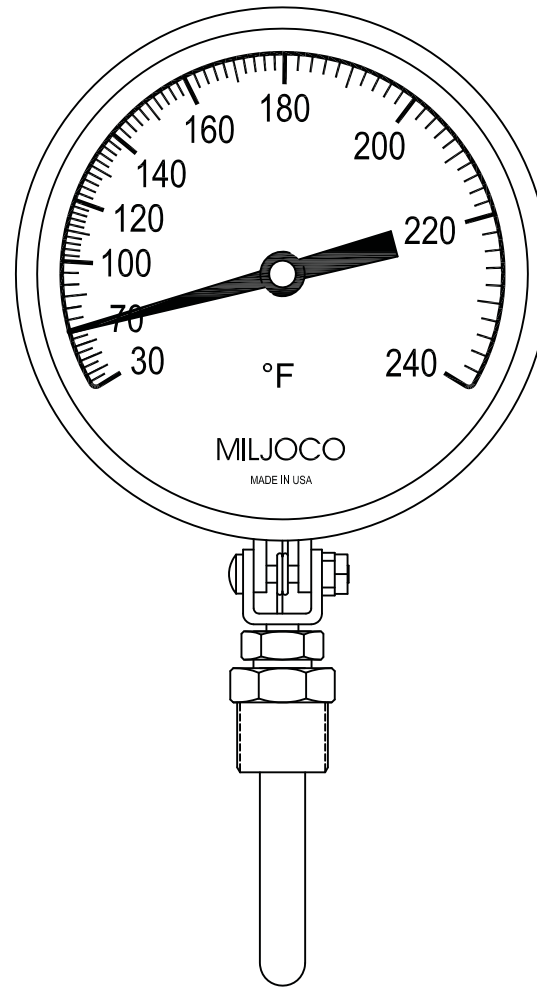

Customer: \_\_\_\_\_

Project: \_\_\_\_\_

Engineer: \_\_\_\_\_

Pro or PO#: \_\_\_\_\_

<b>MILJOCO</b>			
CORPORATION 200 Elizabeth Street, Mt. Clemens, Michigan 48043 USA			
SCALE: None	APPROVED BY:	DRAWN BY: HMT	
DATE: 5/10/05		REVISED:	
<b>4.5" &amp; 3.5" Pipe Line Thermometer</b>			
.XX ± .010	.XXX ± .005	MODEL NUMBER: V4598AC/V3567AC	DRAWING NUMBER: 127-108