

# REFRIGERATION THERMOMETER

Bimetal Type

## 2" Rear Connection - Plastic Rear Flange Case

The plastic case, 2" Bimetal thermometer is a less expensive alternative to the stainless steel case and has a rear flange case for surface mounting. The Bimetal thermometer is designed to withstand vibration and other abuse a thermometer may experience. This instrument has a shallow case depth, which is ideal for space conservation. Common applications are food coolers, floral cases, hot food holding cases, & air ducts.

### NSF® Service

Many Miljoco thermometers are listed by NSF® for use in the food service industry. Consult factory for available models and ranges.



B20146

### General Specifications

**CASE:** ABS, black or white, with surface mounting rear flange.

**LENS:** Polycarbonate.

**DIAL:** Aluminum, black or white finish standard.

Other colors available as special order.

**POINTER:** Black or white, non-adjustable.


**CONNECTION:** Plain.

**STEM:** 300 series stainless steel, Ø 0.250".

**ACCURACY:** ±One scale division.

**AMBIENT TEMPERATURE:** -40 to 140°F (-40 to 60°C).

### Stem Lengths & Dimensions (in.)

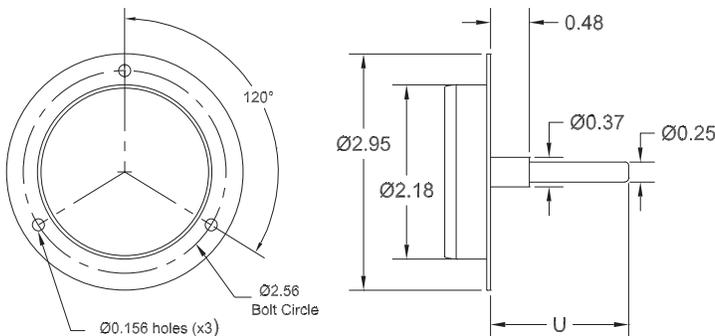

Stem Length "U" (in.)		
Code	2	4
Dim.	1.74	3.97

Other stem lengths available - consult factory.

### Ranges

Range Code	Range	°F Scale		°C Scale	
		Fig.	Div.	Fig.	Div.
31	-40 to 110°F / -40 to 40°C	10°	2°	10°	1°
50	30 to 240°F	20°	2°	-	-

### To Order

**B 2 0 1 4 6**

Model Number

**3 1 - 2**

Range Code

Stem Length

200 Elizabeth St. Mt. Clemens, MI 48043

Ph: 888.888.1498 Fax: 586.777.7891 www.miljoco.com

